

Fisurada B24 / A

DETAILED DESIGN



Gypsum boards for detachable suspended ceilings, manufactured in Spain using plaster reinforced with glassfiber, according to the European standard UNE-EN 14246:2007.

The use of plaster E-35 of the highest purity and whiteness as the main raw material in the manufacture of our ceilings, gives the product excellent technical features, being 100% mineral, biodegradable and ecological.


Installation requires a suspension system mainly composed of primary and secondary T-shape profiles, which create a grid structure on which the boards rest. The fully detachable system allows easy access to the plenum, to facilitate maintenance of lighting systems, air conditioning and all kind of installations.

URBAN ceilings provide a decorative solution, as well as technical and functional, suitable for application in different areas such as offices, health centres, industry, educational facilities, hotels and restoration, leisure areas, shops, homes, etc.

TECHNICAL FEATURES:

FEATURE	TECHNICAL PERFORMANCE	TECHNICAL STANDARD
Fireproof	A1	UNE-EN 14246:2007
Bending resistance	> 6 kg	UNE-EN 14246:2007
Thermal conductivity	0,30 W/m·K	UNE-EN 14246:2007
PH	8,4	UNE-EN 14246:2007

MEASURES AND PACKING

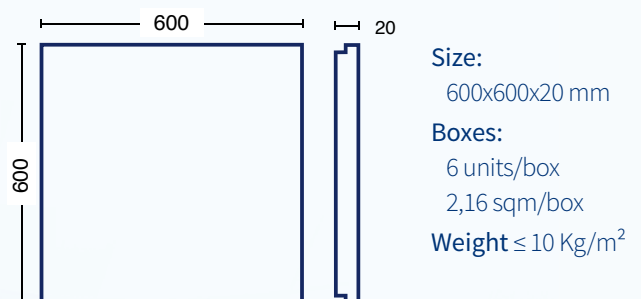

EDGE AND ADMISSIBLE PROFILE



Fireproof
Euroclass A1



Water
vapour
permeable



Thermal
and acoustic
insulation



Low thermal
conductivity



Light
reflection



Moisture
resistance



Aseptic
product



Easy to
paint




Ecological
product



B24



A



B15